



RVS Handkettingtakel / Stainless Steel Manual Chain Hoist

Eigenschappen

- » Hoge bescherming tegen corrosie en vocht.
- » Geschikt voor 'clean rooms' en voedingsindustrie.
- » Gehele buitenzijde en haken gemaakt van 304(V2A) roestvast staal.
- » Hand- en lastketting gemaakt van 304(V2A) roestvast staal.
- » Onderhoudsvriendelijk ontwerp. Rem en transmissie zijn eenvoudig toegankelijk.
- » De transmissie wordt ondersteund door hoogwaardige lagers.
- » Fijn geslepen assen, nestenwiel en tandwielen zorgen voor een soepele werking.
- » Meetpunten op de haken.
- » Voldoet aan de Machinerichtlijn 2006/42/EG. Geleverd met testcertificaat, CE-conformiteitsverklaring en gebruiksaanwijzing.

Features

- » Maximum protection against corrosive and high humidity environments.
- » Suitable for cleanrooms and food-industry applications.
- » All outer body parts and load hooks made from highly corrosion resistant 304(V2A) stainless steel.
- » Load and hand chain made from highly corrosion resistant 304(V2A) stainless steel.
- » Maintenance friendly design. Brake and transmission are easy to access.
- » The transmission is supported by high-quality bearings.
- » Precision machined shafts, chain sprocket and gears ensure smooth operation.
- » Measurement points on the hooks.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.



Specificaties / Specifications									
Artikelnummer	Capaciteit	Hijsketting	Parten	Test load	Inspanning voor max lading	Handketting voor 1m lift	Netto gewicht	Extra gewicht	
Article code	Capacity	Load chain	Chain falls	Test load	Effort for max load	Hand chain for 1m lift	Net weight	Extra weight	
	ton	Øxmm		kN	N	m	kg *	kg/m **	
DSS.0.06600500	0.5	6 x 18	1	6.25	150	28	6.9	1.7	
DSS.0.06601000	1	7 x 21	1	12.5	304	48	7.1	1.9	
DSS.0.06602000	2	7 x 21	2	25	335	96	10.2	3.0	
DSS.0.06603000	3	9 x 27	2	37.5	343	146	18.3	4.4	
DSS.0.06605000	5	9 x 27	3	62.5	270	220	38.1	6.2	


* zonder last- en handketting / without load- and handchain ** per meter hijshoogte voor last- en handketting / per meter hoisting height for load- and handchain

Specificaties / Specifications	
Haken / Hooks	Gesmede RVS haken met klep / Drop-forged stainless steel hooks with latch
Lastketting / Load chain	RVS lastketting / Stainless steel load chain
Handketting / Hand chain	RVS handketting / Stainless steel hand chain
Bedrijfstemperatuur / Operating temperature	-10°C - +60°C
ATEX zone / ATEX zone	niet geschikt / not suitable
Ladingtype / Load type	Goederen, mag niet gebruikt worden om mensen te hijsen / Goods, may not be used to lift people

Beveiliging / Protection	
Overlastbeveiliging / Overload protection	Zonder overlastbeveiliging / No overload protection
Rem / Brake	Automatische veiligheidsrem met dubbele remschrijven en pallen / Automatic safety load brake with twin friction discs and pawls



Afmetingen / Dimensions

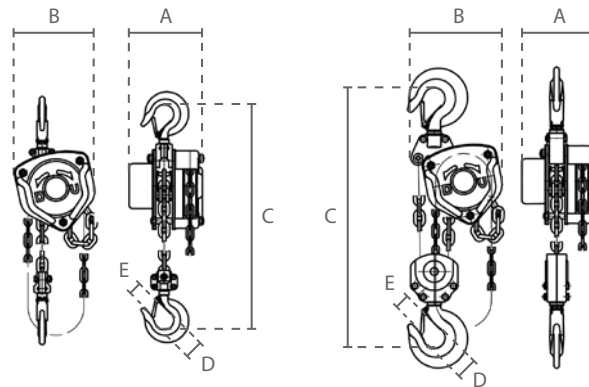

0.5 - 1 ton

2 - 5 ton



Afmetingen / Dimensions

Capaciteit / Capacity ton	A	B	C	D	E
0.5	151	172	376	40	26
1	151	172	376	40	26
2	151	192	425	50	34
3	173	230	565	55	39
5	189	365	710	65	41



.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....